

SIP Türstation mit WEBRELAY NSR650

1. Konfiguration Türstation

IP address: 10.1.0.1
Mask 255.0.0.0
Gateway 10.254.0.1



The image shows a login form with the following fields and controls:

- User:** A text input field.
- Password:** A text input field.
- Language:** A dropdown menu currently set to "English" and a checkbox.
- Login:** A button to submit the form.

User & password
User admin - Password 123456



The screenshot displays the FERMAX SIP VIDEODOOR ENTRY SYSTEM web interface. The left sidebar contains a navigation menu with the following items:

- System
- Network
- Line
- Intercom settings
- Call List
- Function Key
- Security
- Device Log
- Security Settings

The main content area shows the following information:

System Information

Model:	Fermax SIP Panel
PID:	3919
Hardware:	V1.0
Software:	2.12.44.5.7
Uptime:	332 : 17 : 37
Last uptime:	00 : 16 : 39
WAN Speed:	100 (Mbps/s)
MEMInfo:	ROM: 31.8/128(M) RAM: 6.5/38.4(M)
SD Card:	N/A
System time:	10:59 12 FEB MON (SNTF)

Network

Network mode:	Static IP
Ethernet MAC:	08:d9:4a:05:5c:b2
Mobile MAC:	N/A
IP-v4	
Ethernet IP:	192.168.0.150
Mobile IP:	Disconnected
Subnet mask:	255.255.255.0
Default gateway:	192.168.0.1

SIP Accounts

Line 1	901@192.168.0.100:5060 Registered
Line 2	N/A Inactive

2. Konfiguration Action / http: Adresse Webrelay

Output 1: <http://192.168.0.50/state.xml?relay2State=2&PulseTime=3>

- IP Adresse vom Relay anpassen
- relay1, relay2, relay3 od. relay4
- pulseTime= Sekunden

FERMAX
FERMAX SIP VIDEO DOOR ENTRY SYSTEM

Features | Media Settings | Camera Settings | MCAST | **Action** | Time/Date | Time Plan | Tone | Led

> System
> Network
> Line
> Intercom settings
> Call List
> Function Key
> Security
> Device Log
> Security Settings

Action URL Event Settings

Action URL Report Type:

Setup Completed:

Registration Succeeded:

Registration Disabled:

Registration Failed:

Incoming Calls:

Outgoing Calls:

Call Established:

Call Terminated:

Phone Silent:

Phone Unsilent:

Call Mute:

Call Unmute:

Missed Calls:

IP Changed:

Phone State Idle:

Phone State Talking:

Phone State Ringing:

Start Reboot:

Web API Auth Changed:

Echo Test:

Input1:

Reset Input1:

Input2:

Reset Input2:

Output1:

Reset Output1:

Output2:

Reset Output2:

Current Software Version: 2.12.44.5.1


3. WEBRELAY Einstellung

- Control Page



Webrelay Quad		
Relay 1 Description	Relay OFF	ON OFF Pulse
Relay 2 Description	Relay OFF	ON OFF Pulse
Relay 3 Description	Relay OFF	ON OFF Pulse
Relay 4 Description	Relay OFF	ON OFF Pulse

- SETUP Page
Benutzer: admin
Passwort: webrelay

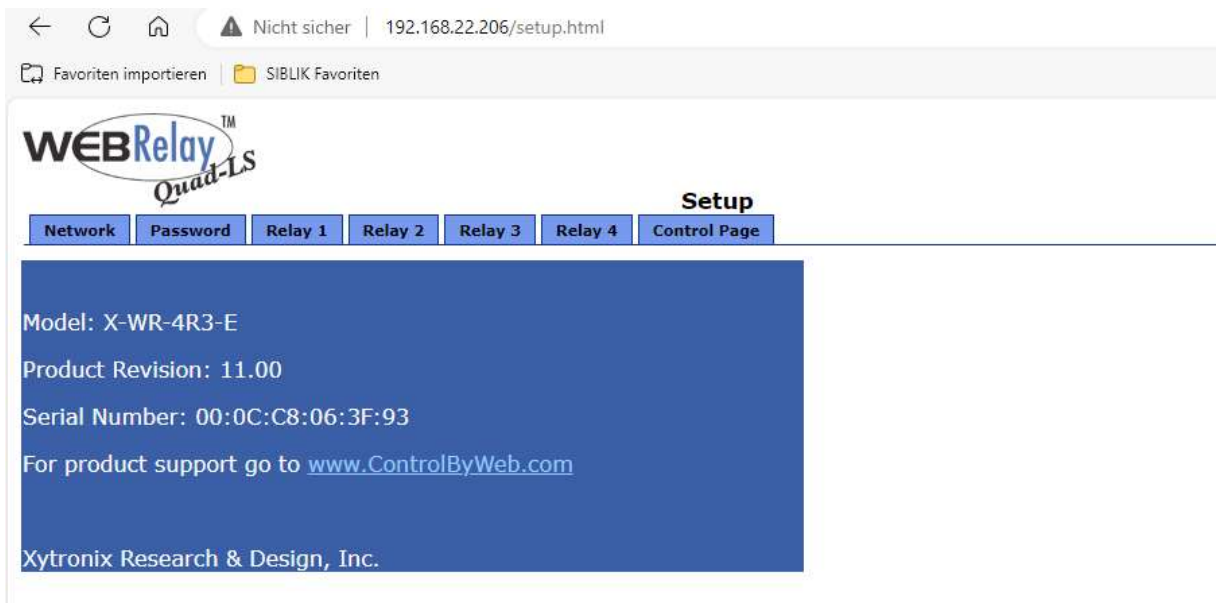

**WEBRelay™
Quad-LS**

Setup

Network Password Relay 1 Relay 2 Relay 3 Relay 4 Control Page

Model: X-WR-4R3-E
Product Revision: 11.00
Serial Number: 00:0C:C8:06:3F:93
For product support go to www.ControlByWeb.com
Xytronix Research & Design, Inc.

4. Türstation – DTMF

Trigger by DTMF Code = # (# zwingend bei Anbindung an die Fermax Cloud)

FERMAX
FERMAX SIP VIDEO DOOR ENTRY SYSTEM

› System
› Network
› Line
› Intercom settings
› Call List
› Function Key
› Security
› Device Log
› **Security Settings**

Basic Settings

Ringtone Duration: (1~600)s
Input & Tamper Server Address:
Message:

Apply

Input Settings >>

Output Settings >>

Triggered By DTMF RingTone:
Triggered By URI Ringtone:
Triggered By SMS Ringtone:
Triggered By Dsskey Ringtone:

Output1:
Standard Status: Output Duration: (0~600)s
Output Trigger Mode:

Trigger By DTMF DTMF Trigger Code:
DTMF Reset Code:
Reset By:
 Trigger By Active URI Trigger Message:
Reset Message:
 Trigger By SMS Trigger Message:
Reset Message:
Trigger By Input: Input1 Input2

Trigger By Call State
Disabled State:
Enabled State: